
Shortcodes

Every component is available as a shortcode. Shortcodes can be nested where the component accepts content, for example buttons inside a button group or accordion items inside an accordion.

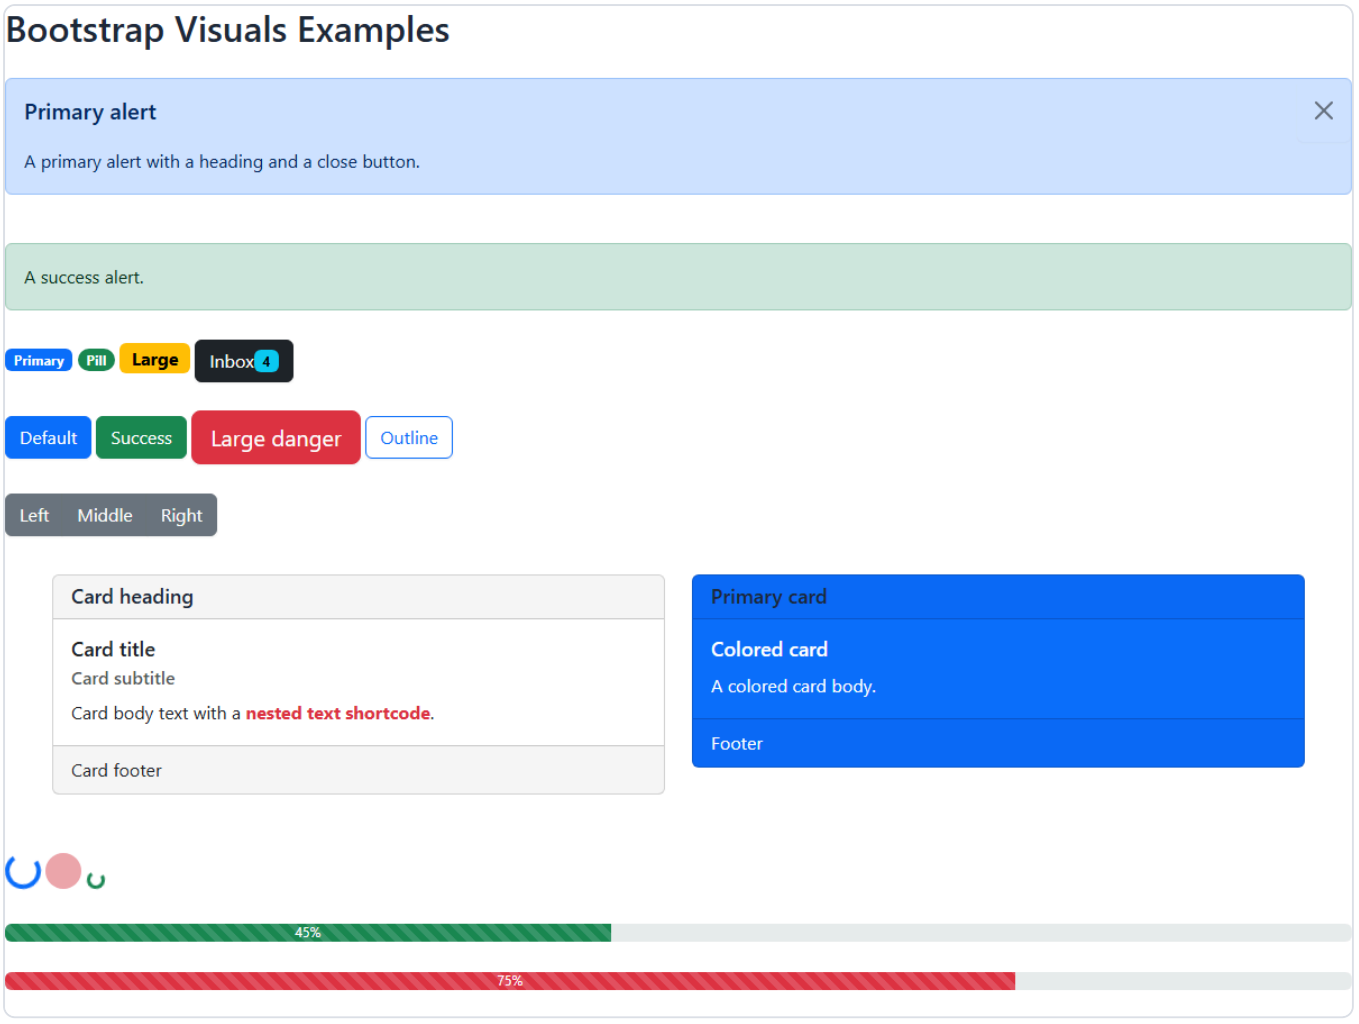

Alerts, badges, buttons, button groups, cards, spinners and progress bars

All 25 shortcodes

Component	Shortcode	Since
Accordion	`[bsv-accordion]`	4.0.0
Accordion item	`[bsv-accordion-item]`	4.0.0
Alert	`[bsv-alert]`	1.0.0
Badge	`[bsv-badge]`	1.0.0
Blockquote	`[bsv-blockquote]`	1.0.0
Button	`[bsv-button]`	1.0.0
Button group	`[bsv-button-group]`	2.0.0
Card	`[bsv-card]`	1.0.0
Code	`[bsv-code]`	1.0.0
Collapse	`[bsv-collapse]`	1.0.0
Column	`[bsv-column]`	1.0.0
Container	`[bsv-container]`	1.0.0
Highlight	`[bsv-highlight]`	2.0.0
Lead	`[bsv-lead]`	2.0.0
List	`[bsv-list]`	2.0.0
Modal	`[bsv-modal]`	1.0.0
Panel	`[bsv-panel]`	1.0.0
Popover	`[bsv-popover]`	2.0.0
Progress bar	`[bsv-progress]`	1.0.0
Row	`[bsv-row]`	1.0.0
Spinner	`[bsv-spinner]`	2.0.0

Component	Shortcode	Since
Table	`[bsv-table]`	2.0.0
Table wrap	`[bsv-table-wrap]`	2.0.0
Text	`[bsv-text]`	2.0.0
Tooltip	`[bsv-tooltip]`	2.0.0

Browse by category

Layout: `bsv-container`, `bsv-row`, `bsv-column`

Content: `bsv-alert`, `bsv-badge`, `bsv-blockquote`, `bsv-card`, `bsv-code`, `bsv-highlight`, `bsv-lead`, `bsv-list`, `bsv-panel`, `bsv-table`, `bsv-table-wrap`, `bsv-text`

Interactive: `bsv-accordion`, `bsv-accordion-item`, `bsv-button`, `bsv-button-group`, `bsv-collapse`, `bsv-modal`, `bsv-popover`, `bsv-progress`, `bsv-spinner`, `bsv-tooltip`

Conventions

- Boolean attributes use `yes` and `no`; the default is always `no` unless the parameter table says otherwise.
- Width and height values accept `px`, `%`, `em` and `rem`, for example `width="400px"` or `width="50%"`.
- Colors accept three- or six-digit hex values and `rgb()` values.
- Shortcode content is escaped with `wp_kses_post`; raw HTML is not supported in shortcode content.
- Every emitted class uses the `bsv-` prefix.

Last updated: 2026-11-18 15:27