
# Code

Displays inline code or a code block. The content is escaped, so markup is shown literally.

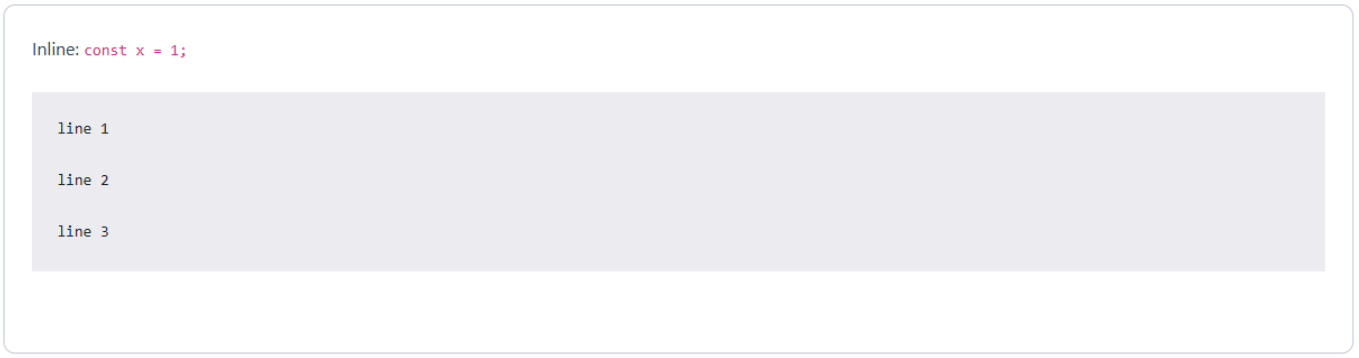


Code examples

## Examples

```
Use [bsv-code]add_action()[/bsv-code] to register a hook.
```

```
[bsv-code block="yes" scrollable="yes"]line one
line two
line three[/bsv-code]
```

## Format

```
[bsv-code parameter="value" ...]your code here[/bsv-code]
```

# Parameters

| Parameter | Description | Default |
| --- | --- | --- |
| `block` | Render a `<pre><code>` block instead of inline `<code>`. | `no` |
| `scrollable` | Add the scrollable class to a block. Only applies when `block="yes"`. | `no` |

Line breaks in block content are preserved. Content is escaped with `esc_html()`; do not use it for HTML that should be rendered.

Last updated: 2026-11-18 15:27