Gutenberg Blocks

Version 3.0 adds two blocks to the WordPress block editor:

- **Jira Issue** – the button, inline or panel display of one issue
- **Jira Filter** – the sortable result table of a JQL query

The blocks use the same rendering code as the shortcodes, so the output is identical. They render on the server and show a live preview in the editor.

Inserting a block

1. Edit a page or post with the block editor.
2. Click the **+** block inserter and search for “Jira”.
3. Insert **Jira Issue** or **Jira Filter**.
4. Open the block settings in the sidebar and fill in the host ID and the other fields.

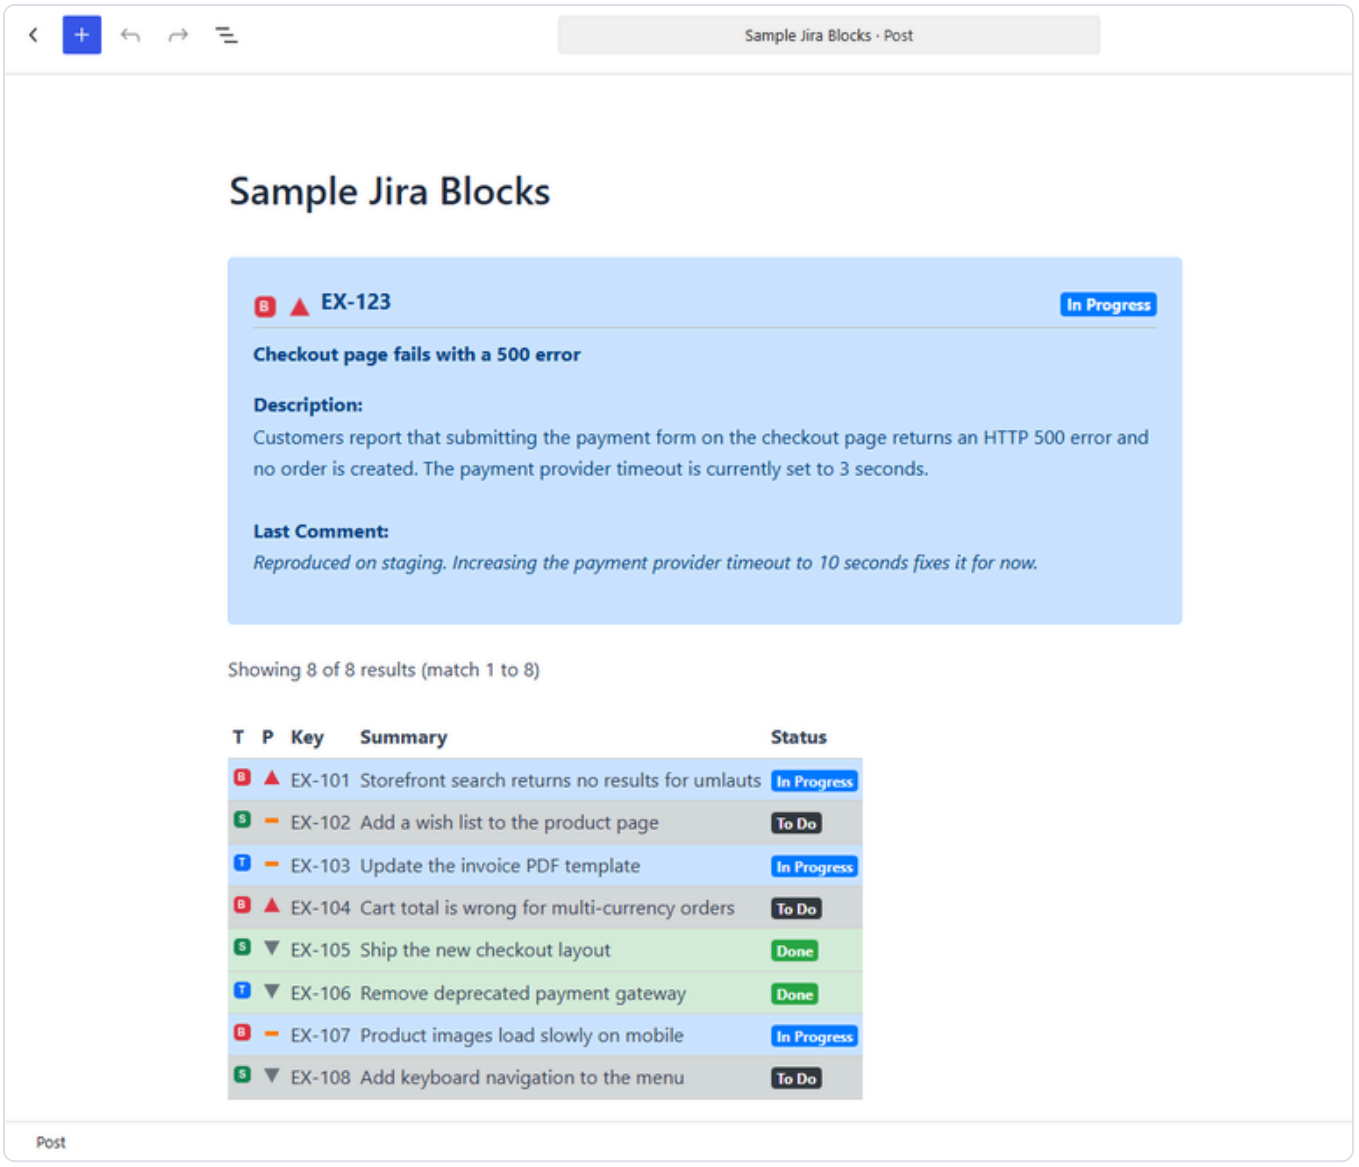

Jira Issue and Jira Filter blocks in the editor

Jira Host ID

The **Jira Host ID** field takes the post ID of a Jira host, not its title. You can find the ID in the host list or in the address bar when you edit the host:

```
wp-admin/post.php?post=317&action=edit
```

In this example the host ID is `317`. See Jira Hosts.

Jira Issue block

Field	Description	Default
Jira Host ID	The post ID of the Jira host.	
Issue Key	The Jira issue key, for example `PROJ-123`.	
Format	Button, inline or panel.	Button
Color	Bootstrap color, or Default for the plugin setting.	Default
Summary characters	Maximum summary length for the button and inline formats. Set 0 to hide it.	
Description characters	Maximum description length for the panel format.	
Outline	Outlined button style.	Off
Link to Jira	Link the issue key to the issue in Jira.	Off

Jira Filter block

Field	Description	Default
Jira Host ID	The post ID of the Jira host.	
JQL	The JQL query, for example `project = PROJ ORDER BY created DESC`.	
Fields	Comma-separated columns such as `issuetype,priority,key,summary,status`.	
Start at	First result to show.	0
Maximum results	Number of issues in the table.	50
Headers	Optional comma-separated column headers.	
Show result count	Show the “Showing x of y results” line.	Off
Link to Jira	Link the issue keys to the issues in Jira.	Off
Debug output	Show the raw Jira response below the table to administrators.	Off

License

The Jira Issue block in **button** format works without a license. The **inline** and **panel** formats and the Jira Filter block need an active license. Without a license, the block preview shows the license message instead of the content.

Empty fields fall back to the defaults on the Options page, just like the shortcode parameters.

Last updated: 2026-11-18 22:46